



ПЛАЗМА-Т



« -2»

634.211.024

2014 .

1.	2
2.	2
3.	2
4.	3
5.	3
6.	6
7.	6
8.	6
9.	6
10.	7
11.	8

1.

634.211.024 (

).

2.

: «

634.211.024».

3.

	380/220 , 50 380/220 , 50
	(0,80±0,05) U . ; (176±9)
	(1,15±0,05) U . .; (253±12,5)
	=100 /0,5 « »
	250 /10
	0,3-10 ,
	220 (4,0)
	10
	-10°C +55°C
	93% 40°C
	IP20
	3.1.
	0,25
	70 86 59
	DIN

3.1.

3.1.1.

()

	(cosφ = 0,4)		(cosφ = 1,0)	
	~250	- 125	~250	- 125
	8,0	8,0	10,0	10,0
	2000	240	2500	480

3.1.2.

	(cosφ = 1,0)
	- 100
	0,5
	10

3.1.3.


4.

.634.211.024

- 1 .
- 1 .

5.1.

5.

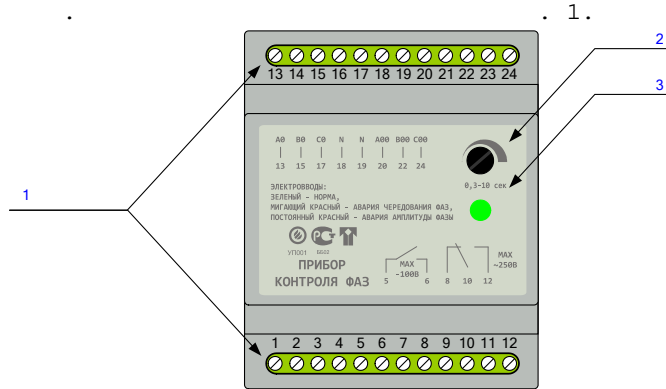


. 1.

- 1.
- 2.
- 3.

5.2.

. 2

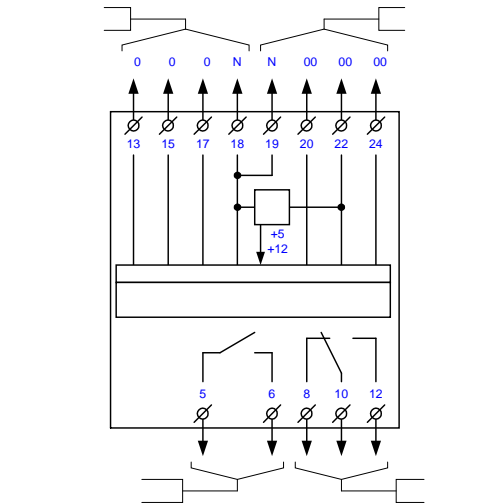

. 2.


5.3.

(),

5.4.


. 3.

. 4.

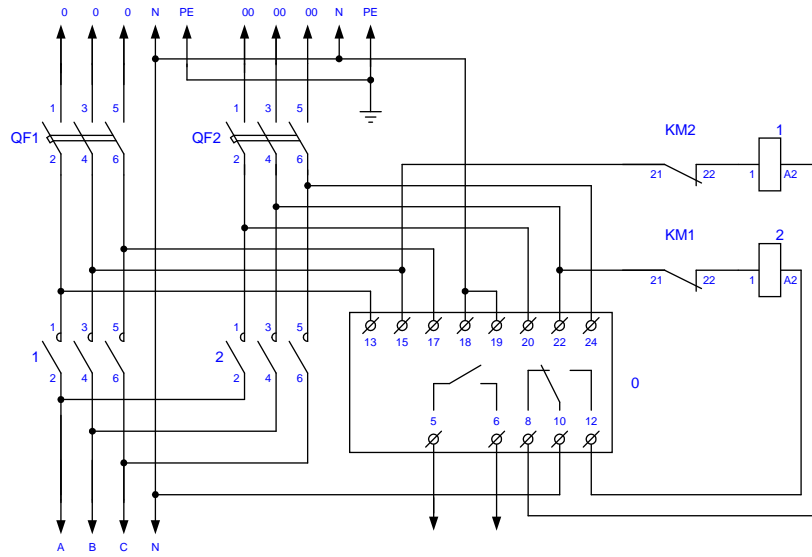

. 3.

3-

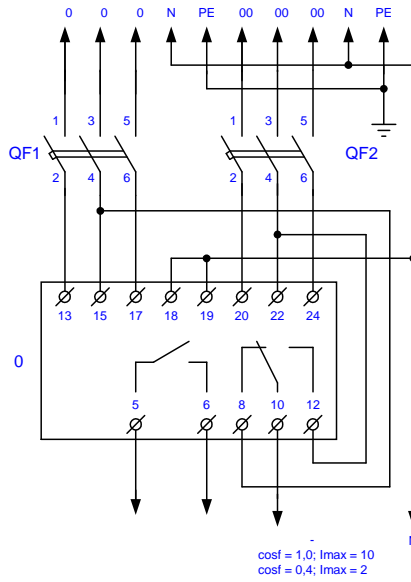

. 4.

1

6.

6.1.

<

1000 >

<

>.

6.2.

6.3.

-

7.

7.1

DIN

7.2

2,5 2.

8

8.1 - 009-02-96 «
8.2 - ».

9

9.1 5 40 , 90% 25 .
9.2 - 3
9.3 (-
9.4) 24 . 20 .

10

634.211.024

4371-007-49934903-11

20 .

- 11.1 24 36
« - » 48
- 11.2 :
■ , ' ; , ' ;
■ , ' ; , ' ;
■ , ' ; , ' ;
■ , ' ; , ' ;
■ , ' ; , ' ;
■ () , (, 13109-97
■) ; (, ') ;
■ , ' ; , ' ;
■ () , ' , ' , ' , ' ,
■ , ' ;
■ , ' ;
- 11.3 , ' , ' , ' , ' ,
- 11.4 « - » (.
25 1966 . N -7), » (.
- 11.5 , ' , ' , ' , ' ,
- 11.6 « - » .